
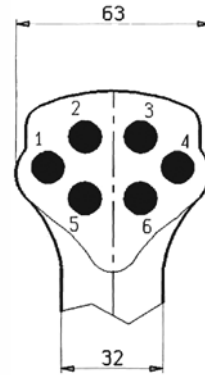


GENERAL SPECIFICATIONS

- POSSIBLE INSERTION OF PUSH BUTTONS: 1, 2, 4, 6.
- PVC CABLES WITH DIAMETER FROM 0,5 MM² AND 256 WIRES FOR CABLE, STANDARD WIRE LENGHT 350 MM FROM THE HANDLE'S BASE.
- CABLES TERMINAL SUPPLIED WITHOUT LEAD-IN WIRE.
- MAX CURRENT ON CONTACTS : 3 AMPERE.
- SAFETY PUSH BUTTON ON REQUEST.
- ELECTRICAL LIFE : 106 CYCLES (1 CYCLE = 2 SEC. "ON" / 2 SEC. OFF WITH CURRENT = 3A VOLTAGE = 12VDC AND WITH ARC SUPPRESSOR DIODE) 105 CYCLES IF USED WITH CURRENT = 3A VOLTAGE = 12VDC AND WITH DIRECT CONNECTION.
- MECHANICAL LIFE : 106 CYCLES.

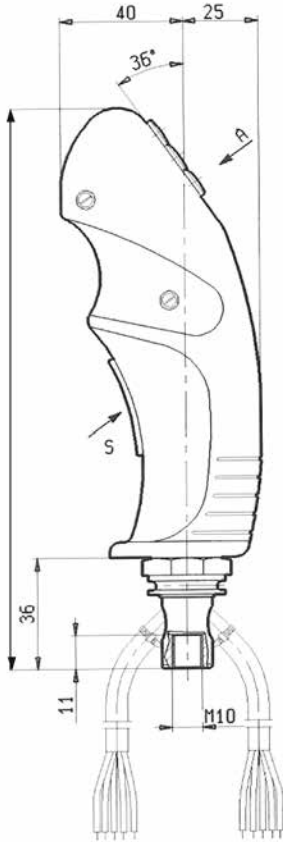


NUMBER OF PUSH BUTTON

VSLVPCED-1	VSLVPCED-2	VSLVPCED-4	VSLVPCED-6

ALSO AVAILABLE ECONOMIC LEVER WITH 1 CONTACT

PART NUMBER
LV-622930

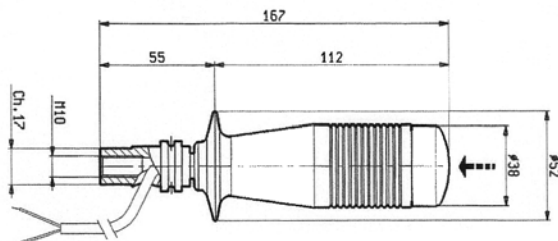

LENGHT CABLE = 410 mm