



SUCTION STRAINERS

- PLATED STEEL PIPE NUT
- 100 MESH STAINLESS STEEL WIRE CLOTH
- OPTIONAL BY-PASS VALVE AVAILABLE
- EASILY CLEANABLE AND REUSABLE
- GOOD FOR MANY FLUID


PART NUMBER	GPM	A	B	C	D
		NPT			
49-3	3	3/8"	1.2"	2.5"	1.9"
49-4	5	1/2"	1.9"	3.1"	2.6"
49-5	8	3/4"	2.9"	3.6"	2.6"
49-10	10	1"	4.6"	5.4"	2.6"
49-20	20	1 1/4"	6.1"	6.9"	3"
49-30	30	1 1/2"	7.2"	8"	3.3"
49-50	50	1 1/2"	9.1"	9.9"	3.9"
49-50-2	50	2"	9.1"	9.9"	3.9"
49-75	75	2 1/2"	9.1"	10.1"	5.1"
49-100	100	3"	10.4"	11.8"	5.1"

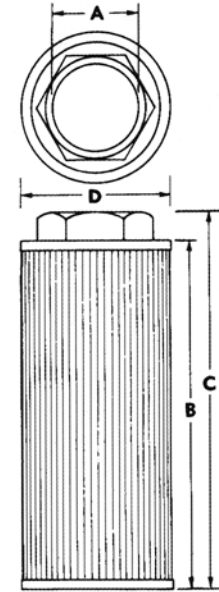

TANK MOUNT STRAINERS

- CAST IRON PIPE NUT
- 100 MESH STAINLESS STEEL WIRE CLOTH
- OPTIONAL BY-PASS VALVE AVAILABLE

PART NUMBER	GPM	DIMENSIONS				
		NPT	NPT	C	D	E
		A	B			
LTM-3	3	3/4"	3/8"	4.0"	1.0"	0.9"
LTM-5	5	1"	1/2"	5.4"	1.1"	1.2"
LTM-10	10	1 1/4"	3/4"	8.2"	1.2"	1.4"
LTM-15	15	1 1/2"	1"	8.2"	1.2"	1.7"
LTM-25	25	2"	1 1/4"	9"	1.4"	2.1"
LTM-50	50	3"	2"	9.7"	1.7"	3"
LTM-100	100	4"	3"	11.3"	1.8"	4"

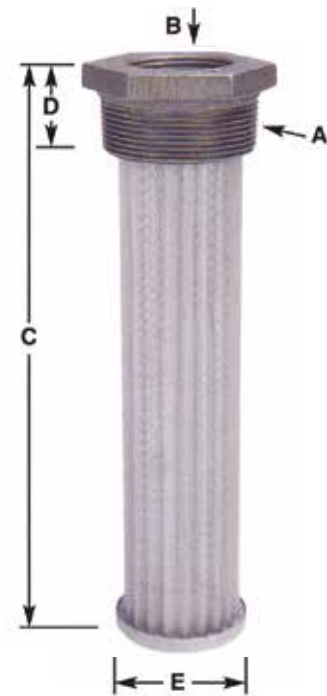

BAYONET FILLER BREATHERS

- ZINC PLATED CAP
- 160 GPM MAXIMUM FLOW
- 40 MICRONS (10 MICRONS AVAILABLE)
- STAINLESS STEEL BASKET (NYLON AVAILABLE)

PART NUMBER	DESCRIPTION
57XL-40	STANDARD MODEL
AS-57XL-40	57XL40 WITH ANTI-SPLASH
LC-57XL-40	57XL40 WITH LOCKING CAP
57XL-40-P5	57XL40 PRESSURIZED TO 5 PSI




METAL THREADED BREATHERS

- ZINC PLATED CAP
- 40 MICRONS (10 MICRONS AVAILABLE)

PART NUMBER	NPT THREAD	GPM	DIMENSIONS		
			A	B	C
BF-4	1/4"	28	1.4"	1.9"	0.7"
BF-6	3/8"				
BF-8	1/2"	245	2.6"	2.9"	0.9"
BF-12	3/4"	280	2.6"	3"	1.1"
BF-12-16 **					
BF-16	1"	525	3"	3.3"	1.4"

** CAN BE PRESSURIZED TO 5 PSI. PART NO IS BF-12-16-P5



NYLON THREADED BREATHERS

- 40 MICRONS (10 MICRONS AVAILABLE)
- ANTI-SPLASH & DIPSTICK OPTIONS ARE AVAILABLE

PART NUMBER	NPT THREAD	DIMENSIONS			
		A	B	C	D
NY-4	1/4"	1.2"	1.4"	0.8"	0.6"
NY-6	3/8"				
NY-8	1/2"	1.6"	1.5"	0.9"	0.6"
NY-12	3/4"	1.8"			
NY-7-12		2.8"	2"	1.4"	0.7"
NY-16	1"	1.8"	1.5"	0.9"	0.6"
NY-7-16		2.8"			
NY-7-20	1 1/4"	2.8"	2.2"	1.4"	0.8"

