


PRESSURE SWITCHES

- FIELD ADJUSTABLE
- CONTACT MAY BE NORMALLY CLOSE OR OPEN
- 9000 PSI RATED PRESSURE
- 1/4 NPT CONNECTION



PART NUMBER	PSI RANGE
SMA-4-4M-C-HC	30-120
SMA-5-4M-C-HC	75-300
SMA-6-4M-C-HC	300-1200
SMA-7-4M-C-HC	1000-3000

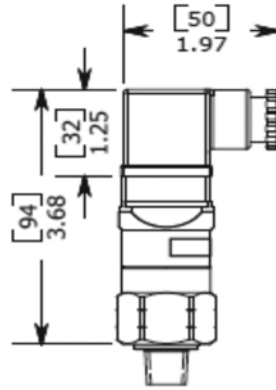

LEVEL SWITCHES

- EASY INSTALLATION, JUST CUT THE CONTROL ROD TO LENGTH
- 1 1/4 NPT THREAD FOR INSTALLATION
- MODEL WITH 2 FLOAT AVAILABLE

PART NUMBER	ROD LENGTH
RL-G1-T3-S1A-A500	19"
RL-G1-T3-S1A-A500	39"

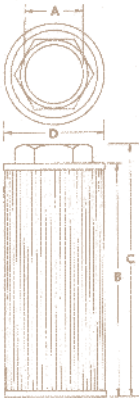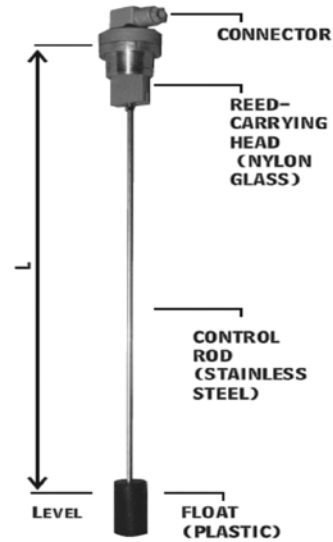

FLOW METERS

- 3500 PSI MAXIMUM PRESSURE
- ACCURACY ± 2.5% OF FULL SCALE ON MID-THIRD OF FLOW RANGE
- ACCURACY ± 4 % OVER ENTIRE FLOW RANGE

PART NUMBER	FLOW RANGE	PORT SIZE
SSF-L00005-N08	0.5 - 5 GPM	1/2 NPT
SSF-L00030-N09	3 - 30 GPM	3/4 NPT
SSF-L00075-N20	8 - 75 GPM	1 1/4 NPT



PRESSURE GAUGES

- 2 1/2" ROUND FACE
- GLYCERIN FILLED
- 1/4 NPT CONNECTION
- 4" DIAMETER AND OTHER RANGES AVAILABLE
- OTHER RANGE AVAILABLE

STEM MOUNT

PART NUMBER	PSI RANGE
WLGS-600	0-600
WLGS-1000	0-1000
WLGS-2000	0-2000
WLGS-3000	0-3000
WLGS-5000	0-5000

BACKMOUNT

PART NUMBER	PSI RANGE
WLGC-600	0-600
WLGC-1000	0-1000
WLGC-2000	0-2000
WLGC-3000	0-3000
WLGC-5000	0-5000



DIGITAL PRESSURE GAUGES

- DISPLAY MEASURED VALUES AS WELL AS MIN AND MAX VALUES
- RUBBER PROTECTIVE COVERING
- UNITS: BAR, PSI, MPA, KPA
- 0-5800 PSI RANGE, 11600 PSI MAX, 24600 PSI BURST PRESSURE
- RESET BUTTON
- BACKGROUND LIGHTNING
- ACCURACY OR 0.5% OF FULL SCALE
- SAE 04 CONNECTION
- WIRELESS AVAILABLE

PART NUMBER	PSI RANGE
SPG-DIGI-B0400-U	0-5800



PRESSURE TRANSDUCERS

- 10-30VDC SUPPLY VOLTAGE
- 0-5000 PSI RANGE, OTHER RANGE AVAILABLE
- 1/4 NPT CONNECTION
- ACCURACY 0.5% OF SPAN
- RESPONSE TIME < 4MS

PART NUMBER	SIGNAL OUTPUT
LZAT-P-5M-4N-A-A-AG-N	4-20 MA
LZAT-P-5M-4N-F-A-AG-N	0-10V

