

2 WAY HIGH PRESSURE

- CARBON STEEL ZINC PLATED
- SAE PORTS MODEL ALSO AVAILABLE FROM STOCK

PART NUMBER	MAX PSI	PORT SIZE
BKH-14-NPT-1125	7250	1/4 NPT
BKH-38-NPT-1125		3/8 NPT
BKH-12-NPT-1125		1/2 NPT
BKH-34-NPT-1125	5880	3/4 NPT
BKH-1-NPT-1125	5145	1" NPT
BKH-114-NPT-1125		1 1/4" NPT
BKH-112-NPT-1125		1 1/2" NPT

FULL PORTED MODELS



PART NUMBER	MAX PSI	PORT SIZE
SKH-1-NPT-3125	5880	1" NPT
SKH-114-NPT-3125		1 1/4" NPT
SKH-112-NPT-3125		1 1/2" NPT

LOCKING DEVICE

PART NUMBER	DESCRIPTION
LK1	FOR BKH 1/4" TO 1/2"
LK2	FOR BKH 3/4" TO 1 1/2"

3 WAY HIGH PRESSURE CARBON STEEL ZINC PLATED



PART NUMBER	MAX PSI	PORT SIZE
WBV3L-400	7250	1/4 NPT
WBV3L-600		3/8 NPT
WBV3L-800		1/2 NPT
WBV3L-1200	4500	3/4 NPT
WBV3L-1600		1" NPT

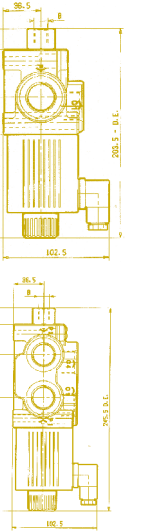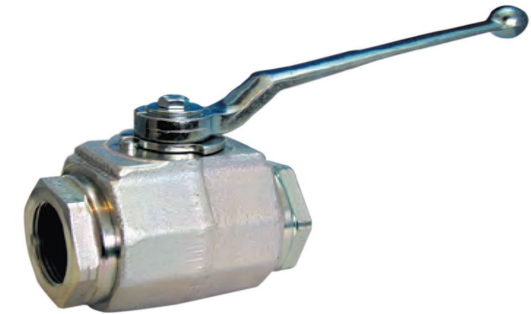


CHECK VALVES

- FREE FLOW IN ONE DIRECTION AND BLOCKED IN THE OTHER
- ZINC CLEAR PLATED BODY
- METAL TO METAL SEAT
- SAE THREADS AVAILABLE

PART NUMBER	PORTS NPT	MAX PSI	MAX GPM	SPRING BY-PASS	DIMENSIONS	
					B	C
HSP-1000-2-5	1/4"	6000	6	5 PSI	2.44	0.87
HSP-1000-2-6.5				65 PSI		
HSP-1000-3-5	3/8"	6000	9.5	5 PSI	2.87	0.95
HSP-1000-3-6.5				65 PSI		
HSP-1000-4-5	1/2"	5000	18	5 PSI	3.5	1.14
HSP-1000-4-6.5				65 PSI		
HSP-1000-6-5	3/4"	5000	30	5 PSI	4.25	1.5
HSP-1000-6-6.5				65 PSI		
HSP-1000-8-5	1"	5000	35	5 PSI	5.12	1.69
HSP-1000-8-6.5				65 PSI		
HSP-1000-10-5	1 1/4"	3000	60	5 PSI	5.56	2.4
HSP-1000-10-6.5				65 PSI		
HSP-1000-12-5	1 1/2"	3000	90	5 PSI	5.56	2.56
HSP-1000-12-6.5				65 PSI		
HSP-1000-16-5	2"	3000	145	5 PSI	7.91	3.15
HSP-1000-16-6.5				65 PSI		

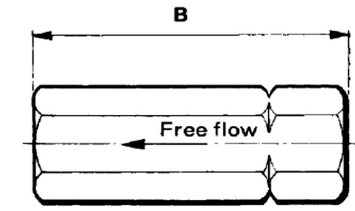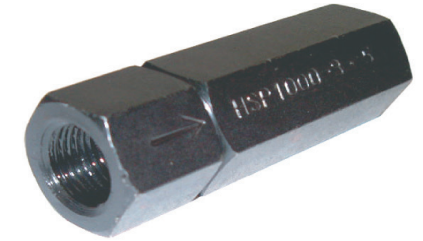

C (Across flats)



(A) FEMALE THREAD BOTH ENDS

VELOCITY FUSES

- PROVIDES FULL-LINE SHUT-OFF IN THE EVENT OF LINE FAILURE
- CLOSING TOLERANCE 15% / - 0%
- MAX PRESSURE: 3500 PSI
- RE-OPENING DIFFERENTIAL: 50 PSI
- FEMALE NPT TO MALE NPT

PART NUMBER	CLOSING GPM	PORTS NPT	DIMENSIONS	
			L	HEX
28900-503-3	3	3/8"	2.7	0.88
28900-503-6	6			
28900-504-7	7			
28900-504-8	8	1/2"	3.0	1.13
28900-504-12	12			

