


BM100 MANUAL VALVES

- ZINC COATED
- DOUBLE ACTING SPOOL, SPRING RETURN WITH LEVERS
- OPEN/CLOSED CENTER. POWER BEYOND OPTION
- HANDLES INCLUDED
- RELIEF SET TO 2550 PSI


PART NUMBER	NB OF SPOOL	GPM MAX	PSI MAX	PORTS
93011006	1	26	3600	SAE 12
93011008	2			
93011009	3			



MODULAR 150/200/250 TIPPING VALVES

- GALVANIZED BODY AND NICKEL SPOOL
- BUILT-IN CHECK AND ADJUSTABLE SAFETY VALVES (DIRECT TYPE)
- MECHANICAL DIRECT END-OF-STROKE WITH ANTI-SHOCK SPRING
- NODULAR CAST-IRON BODY FOR PRESSURE UP TO 5801 PSI


PART NUMBER	NB OF SPOOL	GPM MAX	PSI MAX	PORTS
121-008-50372	1	40	5800	SAE 12
121-922-00517	1	66	5800	SAE 16



BM250 TIPPING VALVE

- MODULAR CAST-IRON BODY FOR PRESSURE UP TO 5801 PSI
- GALVANIZED BODY AND NICKEL SPOOL
- GUARANTEED FOR OIL TEMPERATURE RANGE -15 + 110°C, VISCOSITY RANGE 12 ÷ 100 cSt AND OIL FILTERING 25 µm

PART NUMBER	NB OF SPOOL	GPM MAX	PSI MAX	PORTS
121-015-00104	1	66	5800	SAE 12

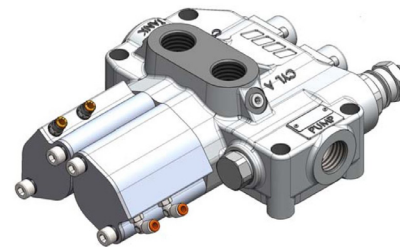

BM150/180 MANUAL VALVES

- ZINC COATED
- DOUBLE ACTING SPOOL, SPRING RETURN WITH LEVERS
- OPEN/CLOSED CENTER. POWER BEYOND OPTION
- HANDLES INCLUDED
- RELIEF SET TO 2550 PSI
- SPECIALLY DESIGNED FOR WINCHES
- AVAILABLE WITH ROTARY LEVERS

ROTARY LEVER	PART NUMBER	SERIE	NB OF SPOOL	GPM MAX	PSI MAX	PORTS
X	92511004	BM150	1	40	4700	P, T, A & B : SAE 12 P2 & T2 : SAE 16
✓	925164					
X	925603	BM180		48		SAE 16
✓	925604					

