VDP08 LOAD SENSE VALVES

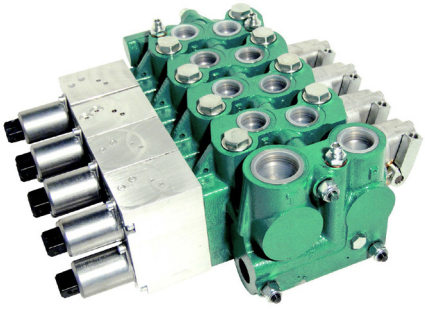

- FOR FIXED OR VARIABLE DISPLACEMENT PUMP
- MANY SPOOL CONTROLS AVAILABLE SUCH AS :
- MANUAL CONTROL
- PNEUMATIC OR HYDRAULIC CONTROL
- ELECTRICAL ON/OFF OR PROPORTIONAL

PART NUMBER	NB OF SPOOL	GPM MAX	PSI MAX	PORTS
VDP08 (CALL US FOR ASSISTANCE)	1 AND +	34 ON P PORT 25 ON A/B PORT	4500	P: SAE 12 A&B: SAE 10 T: SAE 16 LS: SAE 04

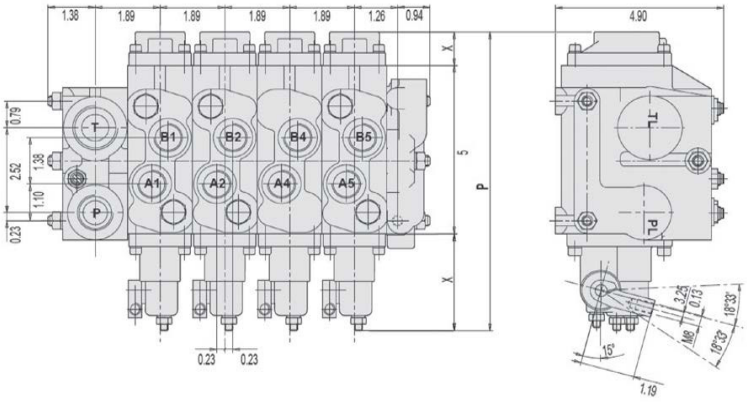

ELECTRONIC PROPORTIONAL PWM CONTROLLED

ELECTRIC SPECIFICATIONS
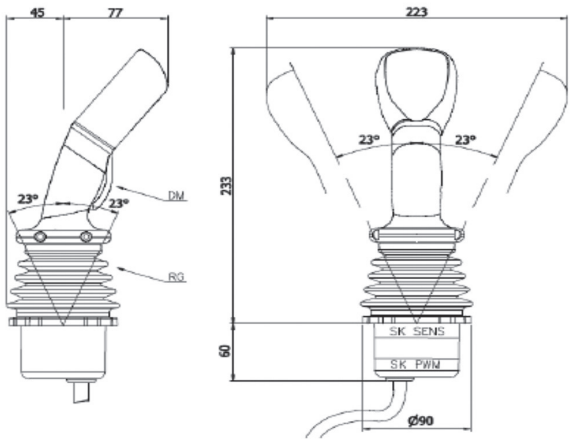
- SUPPLY VOLTAGE: 8-32 VDC
- CURRENT CONSUMPTION @ REST : 250 MA
- SENSOR HALL EFFECT CONTACTLESS TECHNOLOGY
- PWM OUTPUT : 2X DUAL PROPORTIONAL SOLENOID VALVES
- CURRENT OUTPUT RANGE (PWM) FROM 100 TO 1600 MA
- DITHER FREQUENCY : FROM 60 TO 250 HZ (100 HZ FACTORY PRESET)