


■ PRESSURE SWITCHES

- 9000 PSI MAXIMUM PRESSURE
- FIELD ADJUSTABLE
- +/- 2% REPEATABILITY
- 1/4 NPT CONNECTION
- UP TO 3A / 125 VAC SUPPLY
- N.O. OR N.C. CIRCUIT
- DIN CONNECTOR TYPE

PART NUMBER	PSI RANGE	PSI DIFFERENTIAL
BPA-1-4M-C-HC	5 - 85	3 - 10
BPA-1A-4M-C-HC	65 - 300	8 - 30
BPA-3-4M-C-HC	300 - 2500	50 - 300
BPA-4-4M-C-HC	1000 - 6000	150 - 600
BPA-5-4M-C-HC	500 - 3500	75 - 300

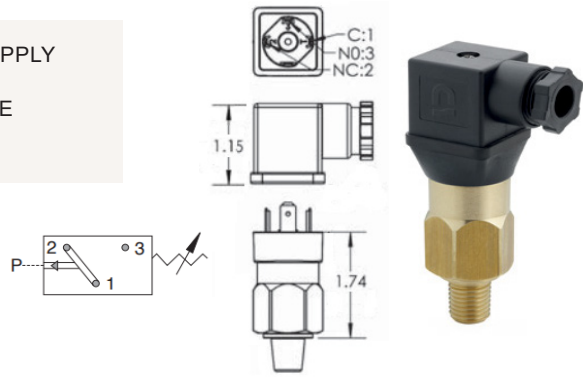

■ VACUUM SWITCH

- 9000 PSI MAXIMUM PRESSURE
- FIELD ADJUSTABLE
- +/- 2% REPEATABILITY
- 1/4 NPT CONNECTION
- UP TO 3A / 125 VAC SUPPLY
- N.O. OR N.C. CIRCUIT
- DIN CONNECTOR TYPE
- 5-85 IN HG RANGE

PART NUMBER
BPA-1-4M-C-HC

■ PRESSURE TRANSDUCERS

- 8700 PSI MAXIMUM PRESSURE
- 4 - 20 MA SIGNAL OUTPUT (2 WIRE)
- 1/4 NPT CONNECTION
- +/- 0.5% REPEATABILITY

- INFORMATION ABOUT THE TDD MODEL WITH LCD DISPLAY
- DISPLAY IN REALTIME
 - CAN BE SET IN DIFFERENT UNITS: KPA, MPA, BAR, PSI
 - PROVIDE ADJUSTMENT TO ZERO AND SPAN CALIBRATION



TDD MODEL WITH LCD DISPLAY

PART NUMBER	PSI RANGE	VOLTAGE SUPPLY	CONNECTOR
XTC-A-0/3000-4M-HCM-81	0 - 3000	12-30 VDC	MINI DIN 43650C
XTC-A-0/6000-4M-HCM-81	0 - 6000		
TDD-A-0/3000-4M-M	0 - 3000	18-30 VDC	M12 - 3 PINS C/W 79" CABLE
TDD-A-0/6000-4M-M	0 - 6000		

ALSO AVAILABLE

- DIFFERENT PORTS AND ADJUSTMENT RANGE
- OTHER OUTPUT SIGNALS & TYPE OF ELECTRICAL CONNECTORS
- FACTORY SET ADJUSTEMENT
- MANY OTHER MODELS FOR SPECIFIC APPLICATIONS
- DIFFERENTIAL PRESSURE SWITCH
- TEMPERATURE SWITCH & TRANSDUCER

